



# OMICRON

Universal Cylindrical Grinding  
Machines

CNC

PLC

CONVENTIONAL



# CONVENTIONA

R

120 kg



600 ÷ 1.000 mm

E

250 kg



600 ÷ 1.500 mm

P

1.200 kg

M

4.000 kg

# PLC



600 ÷ 1.000 mm

# CNC



32

630 ÷ 1.000 mm



630 ÷ 2.030 mm



36



1.150 ÷ 3.150 mm



60



3.000 ÷ 8.000 mm



80

# Conventional

## MANUFACTURED RESPECTING THE TRADITIONAL ITALIAN PRECISION MECHANICS

- High standards of precision
- Flexibility
- Fast set-up
- Ideal for processing components with very tight tolerances
- Sturdiness and Stability:
  - Machine bed in normalised cast iron
  - Grinding wheel spindle mounted on solid bronze bushes



THE MOST APPRECIATED  
BY PROFESSIONAL REBUILDERS



THE RANGE OF  
CONVENTIONAL UNIVERSAL CYLINDRICAL GRINDING  
IS COMPOSED OF :  
MODEL R - LIGHT VERSION  
MODEL E - SUITABLE FOR HEAVIER WORK

# Conventional

## TRADITIONAL MECHANICS ASSISTED BY INCREMENTAL LINEAR AND DISPLAY UNITS

The following parameters are set on the touch screen panel encoder:

- workhead and wheelhead speeds
- automatic cycle parameters , for example:
  - dwell time at reverse
  - number of spark-out passes.





## MANUAL HANDWHEEL FOR TABLE AND WORKHEAD FEEDS

Division on diameter (mm)

Main handwheel	0,01
Micrometric handwheel	0,001
Automatic Zero Stop	



# OMICRON R

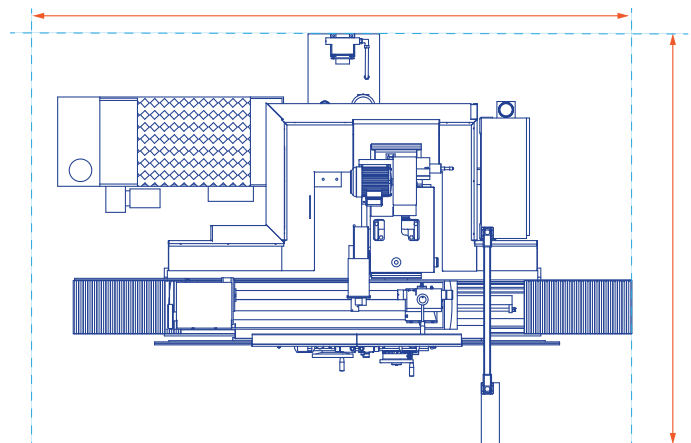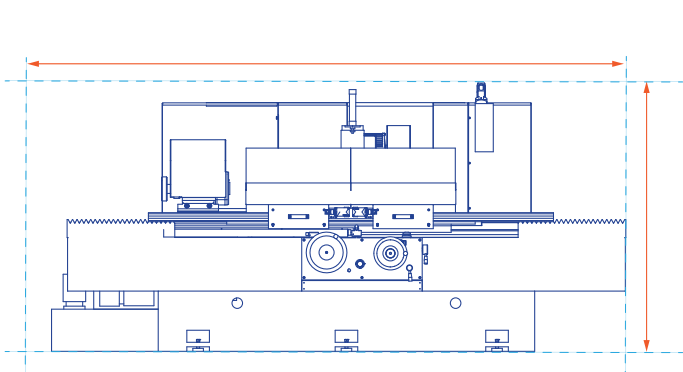

<b>Working Cap acity</b>	<b>600</b>	<b>1000</b>
Distance between centers	max. 600	1000 mm
Grinding length	max. 600	1000 mm
Height of centers over table		160 mm
Swing over table	max. 315	mm
Weight on centers	max. 120	kg
Cantilever weight <sup>1</sup>	max. 40	kg

<b>Table(Z-Axis)</b>	<b>600</b>	<b>1000</b>
Automatic table traverse	max. 680	1080 mm
Swivel on either side	+9°	+8°
	-5°	-4°
Automatic traverse min.	3	mm
Hydraulic translation speed	0-5000 mm/min	
Manual feed for handwheel revolution	13	mm

<b>WorkHead</b>		
Rotation speed	0-600	rpm
Spindle hole diameter	26	mm
Internal center taper	4	MT
External center taper <sup>3</sup>	5	ASA
Swivel max.	90°	

<b>Tail Stock</b>		
Spindle stroke	25	mm
Spindle diameter	43	mm
Internal center taper	4	MT

<b>Wheel Head (X - Axis)</b>		
Swivel	max. +/-	180°
Stroke	max	180 mm
Fast hydraulic stroke		50 mm
Handwheel feed stroke		130 mm
Rotation speed (inverter)	600-1600	rpm


<b>Grinding Wheel Specifications</b>		
Diameter	max.	450 mm
Hole		127 mm
Width	min.	20 mm
	max.	50 mm

<b>Working Feeds</b>		(mm)
Automatic feed at each reversal Rh table		0,01 0,02
		0,03 0,04
Wheel feed for handwheel revolution		2
	micrometric	0,05
Handwheel division values		0,01
	micrometric	0,002

<b>Internal Grinding Attachment</b>		
Hole diameter for spindle	80	mm
Electric motor	1,5	kW




<b>Motors</b>		
Wheelhead	4,00	kW
Workhead	0,75	kW
Hydraulic power pack	0,75	kW
Coolant pump	0,18	kW

<b>Dimensions</b>	<b>600</b>	<b>1000</b>
Length	2540	3750 mm
Width	1350	1350 mm
Height	1750	1750 mm
Net weight	2600	3300 Kg

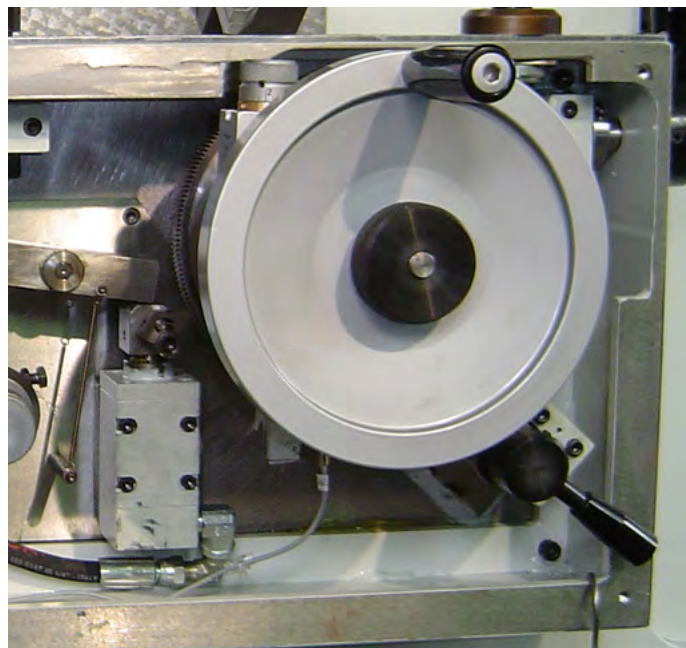

BREAST BAR ALIGNMENT DEVICE  
(Optional)

# OMICRON E

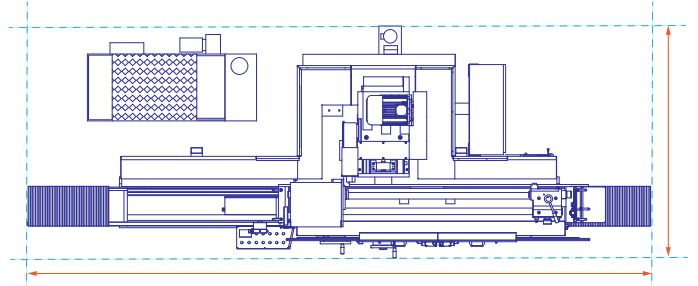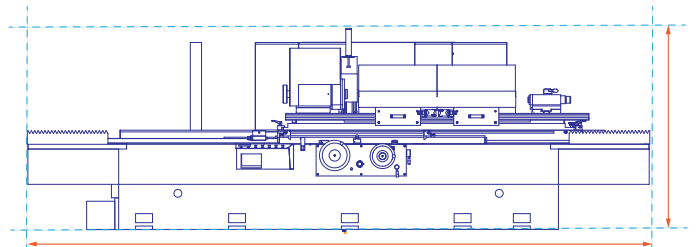



<b>Working Cap acity</b>	<b>600</b>	<b>1000</b>	<b>1500</b>
Distance between centers	max. 630	1030	1530 mm
Grinding length	max. 630	1030	1530 mm
Height of centers over table		180	230 <sup>3</sup> mm
Swing over table	max.	355	455 <sup>3</sup> mm
Weight on centers	max.	250	300 <sup>3</sup> kg
Cantilever weight <sup>1</sup>	max.	80	100 <sup>3</sup> kg

<b>Table (Z - Axis)</b>	<b>600</b>	<b>1000</b>	<b>1500</b>
Automatic table traverse	max. 780	1180	1680 mm
Swivel on either side	+9°	+8°	+7°
	-5°	-4°	-3°
Automatic traverse	min.	3 mm	
Hydraulic translation speed	0-5000 mm/min		
Manual feed for handwheel revolution	13 mm		

<b>WorkHead</b>	
Rotation speed	0-600 rpm
Spindle hole diameter	31 mm
Internal center taper	5 MT
External center taper <sup>3</sup>	5 ASA
Swivel	90° max.

<b>Tail stock</b>	
Spindle stroke	35 mm
Spindle diameter	48 mm
Internal center taper	4 MT

<b>Wheel Head (X - Axis)</b>	
Swivel	max. +/- 180°
Stroke	max 250 mm
Fast hydraulic stroke	50 mm
Handwheel feed stroke	200 mm
Rotation speed (inverter)	600-1600 rpm

<b>Grinding Wheel Specifications</b>	
Diameter	450-500 <sup>3</sup> mm
Hole	127 mm
Width	min. 20 mm
	max. 80 mm

<b>Working Feeds</b>	(mm)
Automatic feed at each reversal Rh table	0,01 0,02
	0,03 0,04
Wheel feed for handwheel revolution	2
	micrometric 0,05
Handwheel division values	0,01
	micrometric 0,002


<b>Internal Grinding Attachment</b>	
Hole diameter for spindle	100 mm
Electric motor	1,5 kW

<b>Motor s</b>	<b>600</b>	<b>1000</b>	<b>1500</b>
Wheelhead	5,50	5,50	5,50 kW
Workhead	1,50	1,50	2,20 kW
Hydraulic power pack <sup>3</sup>	0,75	0,75	0,75 kW
Coolant pump	0,18	0,18	0,18 kW

<b>Dimensions</b>	<b>600</b>	<b>1000</b>	<b>1500</b>
Length	3350	4150	5500 mm
Width	1350	1350	1500 mm
Height	1750	1750	1750 mm
Net weight	3500	4400	5800 kg



## STANDARD EQUIPMENT

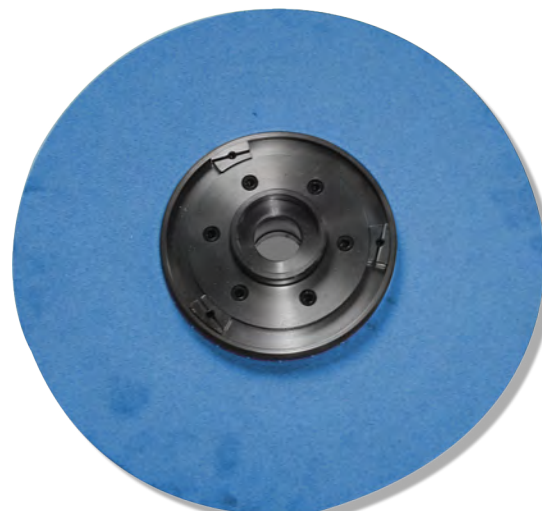

<sup>1</sup>150 mm from workhead spindle nose

<sup>2</sup>Without Inverter

<sup>3</sup>Option

# OMICRON T7: PLC

## AUTOMATIC AND EASY GRINDERS



## AUTOMATIC AND MANUAL Operations GRINDERS

- Excellent versatility and high quality standard
- Extremely fast and precise also when processing complex components
- Easy preset of working diameter
- Single or small batch production workpieces, with the ability to operate both in manual or automatic-mode
- Automatic compensation of diameter after dressing
- In-process measuring gauge and gap control system (on request)

## STANDARD OPERATOR PANEL



# Simple Human-Machine Interface

- Wheelhead and table position visualized on operator panel
- Possibility to program up to 12 different diameters, on the same grinding cycle
- Possibility to update the operator panel, with the correction of each diameter
- Semi automatic grinding cycle, with stop of the grinding wheel feed once the programmed diameter has been reached
- Automatic grinding wheel dressing cycle with compensation of all the grinding dimensions

Axis

X Movement of wheel head

Z Movement of table

Selection of the electronic handwheel division

Automatic

Manual

✓ ✓

✓ ✓

## WORKING CYCLES WITH EASY PROGRAMMING

	OD	ID
PASS	✓	✓
PLUNGE	✓	✓
FACING	✓	
MULTI DIAMETER	✓	✓

- stock removal - rough and finish
- dwell - table inversion
- sparkout time
- sparkout pass

### Pass Grinding Cycles

Automatic increments - rough and finish

### Plunge Grinding Cycles


Automatic feeds - rough and finish

Touch screen operator panel SIEMENS TP700 for easy programming of grinding cycles

## OPERATOR PANEL (Optional)



## PARAMETRIC SCREENS

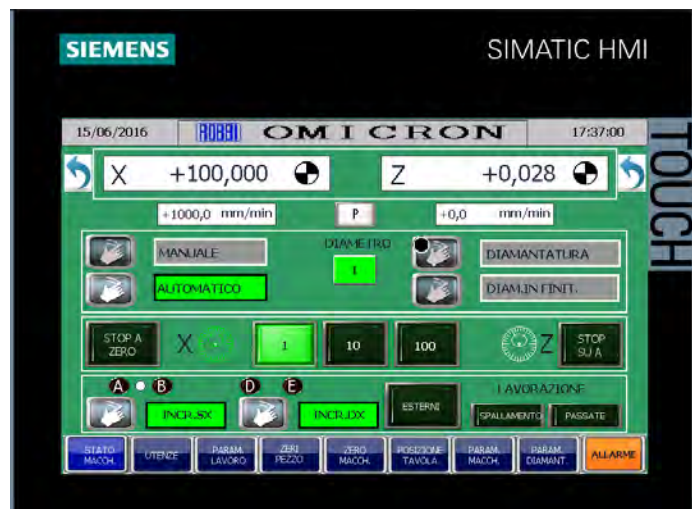

# Omicron R T7



COMPLETE CLOSURE - TYPE B

REMOTE HANDWHEEL  
(Optional)



<b>Working Cap acity</b>	<b>600</b>	<b>1000</b>
Distance between centers	max. 600	1000 mm
Grinding length	max. 600	1000 mm
Height of centers over table		160 mm
Swing over table	max. 315	mm
Weight on centers	max. 120	kg
Cantilever weight <sup>1</sup>	max. 40	kg

<b>Table (Z - Axis)</b>	<b>600</b>	<b>1000</b>
Automatic table traverse	max. 680	1080 mm
Swivel on either side	+9°	+8°
	-5°	-4°
Automatic traverse min.		3 mm
Speed		1-5000 mm/min
Handwheel division	0,001	0,01 0,1 mm

<b>WorkHead</b>	
Rotation speed	0-600 rpm
Spindle hole diameter	26 mm
Internal center taper	4 MT
External center taper <sup>3</sup>	5 ASA
Swivel	90°

<b>Tail Stock</b>	
Spindle stroke	25 50 <sup>3</sup> mm
Spindle diameter	43 70 <sup>3</sup> mm
Internal center taper	4 MT

<b>Wheel Head (X - Axis)</b>	
Swivel	max. +/- 180°
Handwheel division	0,001 0,01 0,1 mm
Manual position travel	250 mm
Stroke	max 480 mm
Speed	max 0,2-3000 mm/min
Rotation speed (inverter)	600-1600 rpm




<b>Grinding Wheel Specifications</b>	
Diameter	max. 450 mm
Hole	127 mm
Width	min. 20 mm
	max. 50 mm

<b>Working Feeds</b>	(mm)
Minimum programmable feed	0,001

<b>Internal Grinding Attachment</b>	
Hole diameter for spindle	80 mm
Electric motor	1,50 kW

<b>Motor s</b>	
Wheelhead	4,00 kW
Workhead	0,75 kW
Wheelhead feed (X axis)	3,00 Nm
Table feed (Z axis)	6,00 Nm
Hydraulic power pack <sup>3</sup>	0,75 kW
Coolant pump	0,18 kW




<b>Dimensions</b>	<b>600</b>	<b>1000</b>
Length	2900	3550 mm
Width	1350	1350 mm
Height	1750	1900 mm
Net weight	2800	3500 Kg

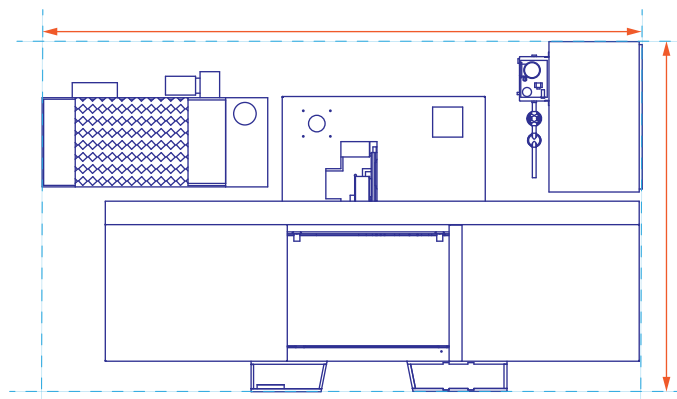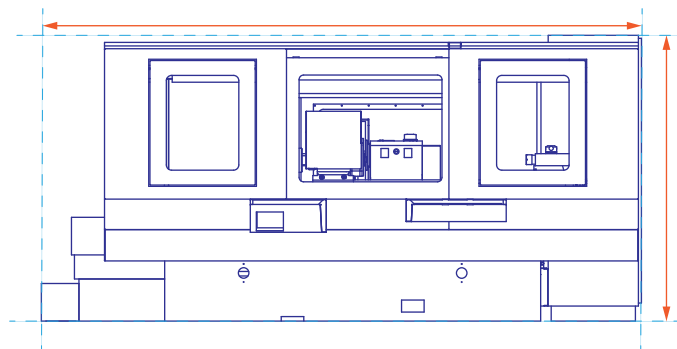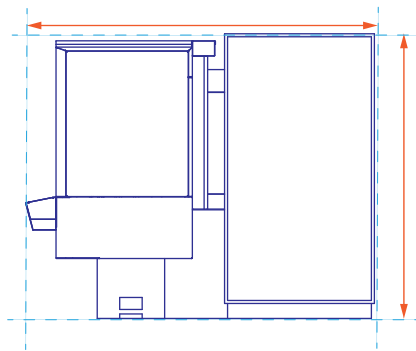

# Omicron E T7



## ESSENTIAL REPAIR - C TYPE

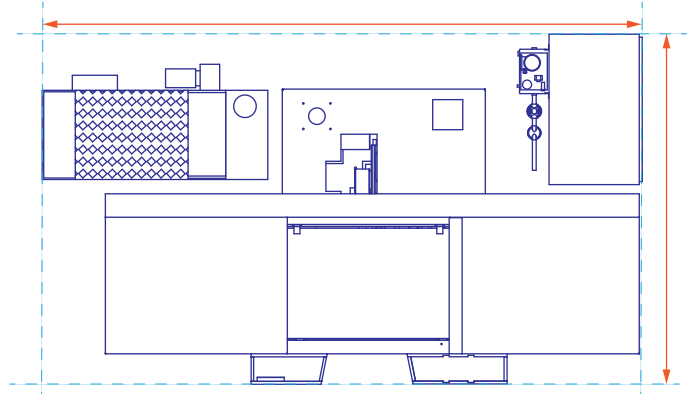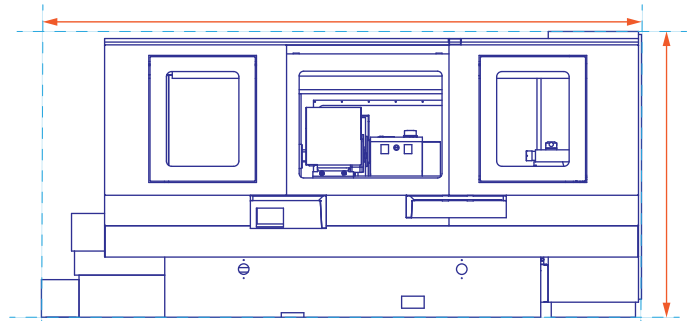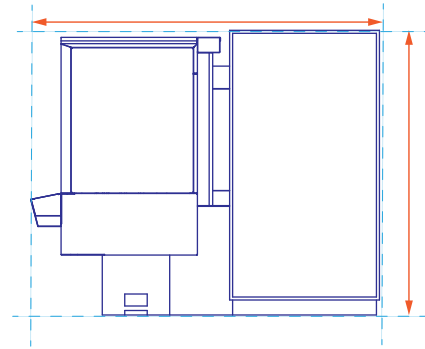

<b>Working Cap acity</b>	<b>600</b>	<b>1000</b>	<b>1500</b>	<b>2000</b>
Distance between centers	max. 630	1030	1530	2030 mm
Grinding length	max. 630	1030	1530	2030 mm
Height of centers over table			180	230 <sup>3</sup> mm
Swing over table		max. 355	455 <sup>3</sup>	mm
Weight on centers		max. 250	300 <sup>3</sup>	kg
Cantilever weight <sup>1</sup>		max. 80	80	kg

<b>Table (Z - Axis)</b>	<b>600</b>	<b>1000</b>	<b>1500</b>	<b>2000</b>
Automatic table traverse	max. 780	1180	1680	2180 mm
Swivel on either side	+9°	+8°	+7°	+6°
	-5°	-4°	-3°	-2°
Automatic traverse	min.		3	mm
Speed			1-5000	mm/min
Handwheel division	0,001	0,01	0,1	mm

<b>WorkHead</b>	
Rotation speed	0-600 rpm
Spindle hole diameter	31 mm
Internal center taper	5 MT
External center taper <sup>3</sup>	5 ASA
Swivel	90°

<b>Tail Stock</b>	
Spindle stroke	35 70 <sup>3</sup> mm
Spindle diameter	48 70 <sup>3</sup> mm
Internal center taper	4 5 MT

<b>Wheel Head (X - Axis)</b>	
Swivel	max. +/- 180°
Handwheel division	0,001 0,01 0,1 mm
Manual position travel	250 mm
Stroke	max 480 mm
Speed	max 0,2-3000 mm/min
Rotation speed (inverter)	600-1600 rpm

<b>Grinding Wheel Specifications</b>	
Diameter	450-500 <sup>3</sup> mm
Hole	127 mm
Width	min. 20 mm
	max. 80 mm

<b>Working Feeds</b>	(mm)
Minimum programmable feed	0,001

<b>Internal Grinding Attachment</b>	
Hole diameter for spindle	100 mm
Electric motor	1,50 kW

<b>Motor s</b>	<b>600</b>	<b>1000</b>	<b>1500</b>	<b>2000</b>
Wheelhead	5,50 - 7,50 <sup>3</sup>			kW
Workhead	1,50 - 2,20 <sup>3</sup>			kW
Wheelhead feed (X axis)	3,00			Nm
Table feed (Z axis)	11,00			Nm
Hydraulic power pack <sup>3</sup>	0,75			kW
Coolant pump	0,18			kW

<b>Dimensions</b>	<b>600</b>	<b>1000</b>	<b>1500</b>	<b>2000</b>
Length	2900	3700	5200	6600 mm
Width	1500	1500	1500	1500 mm
Height	2100	2100	2100	2100 mm
Net weight	3800	4700	6200	7700 Kg



LATERAL REMOTE HANDWHEEL  
(Optional)



# Omicron P T7



ESSENTIAL REPAIR - C TYPE






ESSENTIAL REPAIR - C TYPE (rear view)





**OMICRON 2000 PT6**

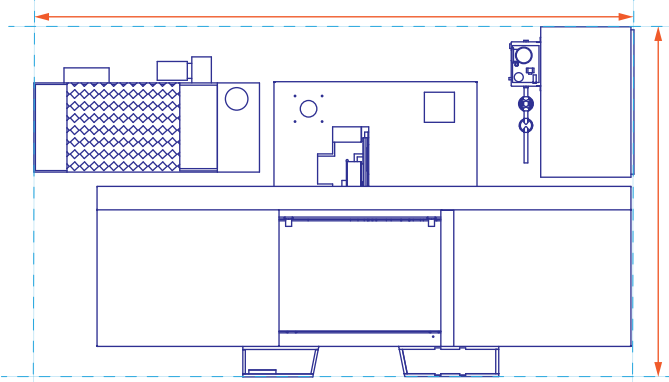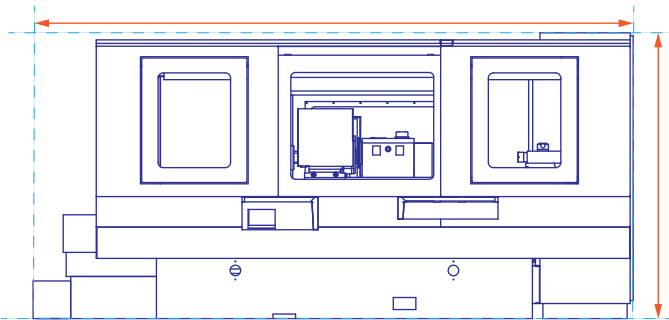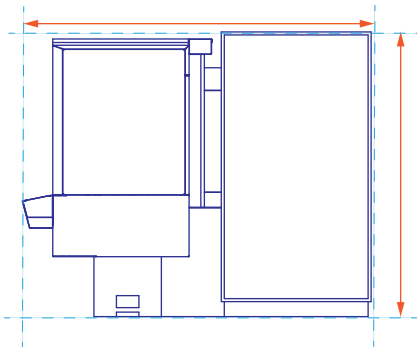

<b>Working Capacity</b>	<b>1000</b>	<b>1500</b>	<b>2000</b>	<b>3000</b>
Distance between centers	max 1150	1750	2250	3150 mm
Grinding length	max 1000	1600	2100	3000 mm
Height of centers over table			300	350 <sup>3</sup> mm
Swing over table		max. 595	695 <sup>3</sup>	mm
Weight on centers		max. 1200		kg
Cantilever weight <sup>1</sup>		max. 120		kg

<b>Table (Z - Axis)</b>	<b>1000</b>	<b>1500</b>	<b>2000</b>	<b>3000</b>
Automatic table traverse	max. 1150	1650	2150	3050 mm
Swivel on either side	+8°	+7°	+6°	+5°
	-4°	-3°	-2°	-1°
Automatic traverse	min.		3	mm
Speed			1-5000	mm/min
Handwheel division	0,001	0,01	0,1	mm

<b>WorkHead</b>	
Rotation speed	0-300 rpm
Spindle hole diameter	44 mm
Internal center taper	6 MT
External center taper <sup>3</sup>	8 ASA
Swivel	90°

<b>Tail Stock</b>	
Spindle stroke	70 mm
Spindle diameter	80 mm
Internal center taper	5 MT

<b>Wheel Head (X - Axis)</b>	
Swivel	max. +/- 180°
Handwheel division	0,001 0,01 0,1 mm
Manual position travel	250 mm
Stroke	max 480 mm
Speed	max 0,2-3000 mm/min
Rotation speed (inverter)	600-1250 rpm

<b>Grinding Wheel Specifications</b>	
Diameter	max. 610 mm
Hole	230 mm
Width	min. 50 mm
	max. 120 mm

<b>Working Feeds</b>	(mm)
Minimum programmable feed	0,001

<b>Internal Grinding Attachment</b>	
Hole diameter for spindle	100 120 <sup>3</sup> mm
Electric motor	2,20 4,00 <sup>3</sup> kW

<b>Motor s</b>	
Wheelhead	11,00 15,00 <sup>3</sup> kW
Workhead	4,0 5,5 <sup>3</sup> kW
Wheelhead feed (X axis)	6,00 Nm
Table feed (Z axis)	11,00 Nm
Hydraulic power pack	0,75 kW
Coolant pump	0,18 kW




<b>Dimensions</b>	<b>1000</b>	<b>1500</b>	<b>2000</b>	<b>3000</b>
Length	5200	5700	6850	9000 mm
Width	1950	1950	1950	1950 mm
Height	2100	2100	2100	2100 mm
Net weight	6800	8100	9300	11000 Kg


<sup>1</sup>150 mm from workhead spindle nose

<sup>2</sup>Without Inverter

<sup>3</sup>Option

# Omicron M T7

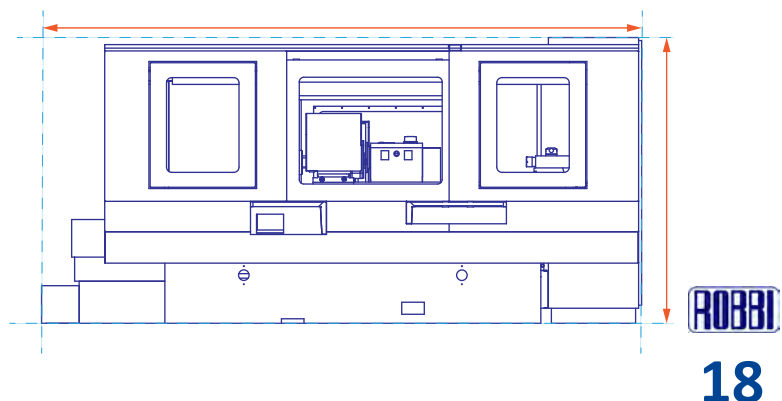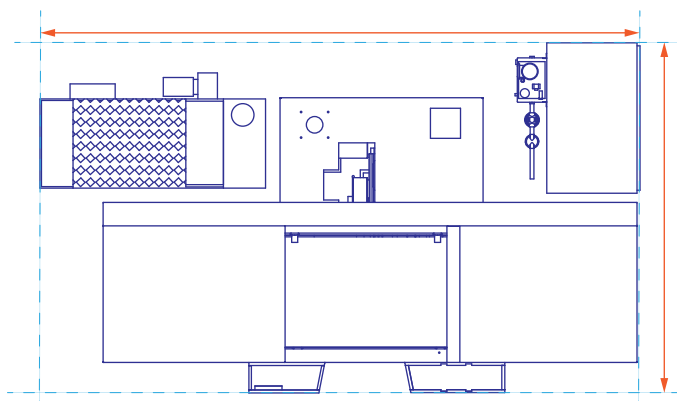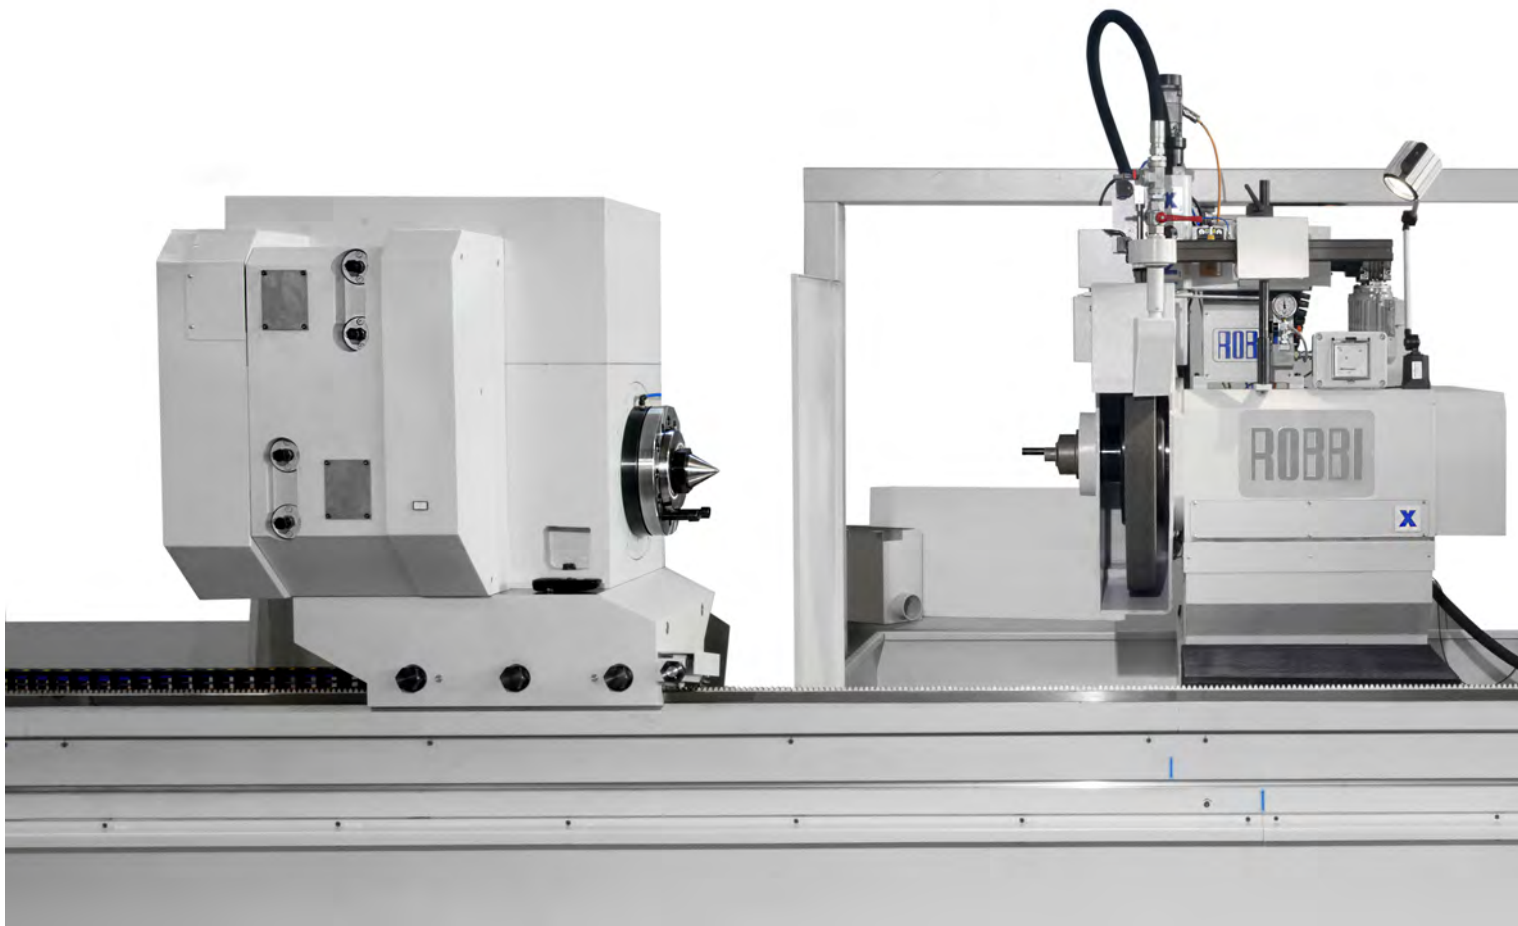

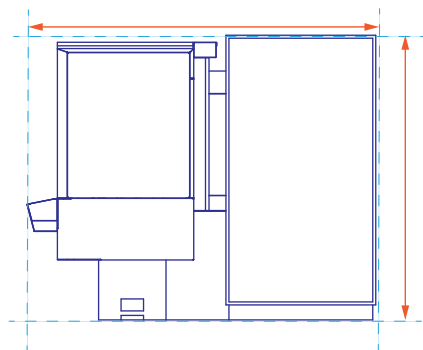

<b>Working Capacity</b>	<b>3000</b>	<b>4000</b>	<b>5000</b>	<b>6000</b>	<b>8000</b>
Distance between centers max	3000	4000	5000	6000	8000 mm
Grinding length max	3000	4000	5000	6000	8000 mm
Height of centers over table			400	450 <sup>3</sup>	500 <sup>3</sup> mm
Swing over table		max.	795	895 <sup>3</sup>	995 <sup>3</sup> mm
Weight on centers		max.		4000	kg
Cantilever weight <sup>1</sup>		max.	180		kg

<b>Table (Z - Axis)</b>	<b>3000</b>	<b>4000</b>	<b>5000</b>	<b>6000</b>	<b>8000</b>
Automatic table traverse max	3200	4200	5200	6200	8200 mm
Swivel on either side	+5°	+4°	+3°	+2°	+0°
	-1°	-1°	-1°	-1°	-0°
Automatic traverse min.					3 mm
Speed					1-5000 mm/min
Handwheel division		0,001	0,01	0,1	mm

<b>WorkHead</b>	
Rotation speed	0-150 rpm
Spindle hole diameter	44 mm
Internal center taper	6 MT - 8 METRICO <sup>3</sup>
External center taper <sup>3</sup>	8 ASA
Swivel	90°

<b>Tail Stock</b>	
Spindle stroke	80 mm
Spindle diameter	120 mm
Internal center taper	6 MT

<b>Wheel Head (X - Axis)</b>	
Swivel	max. +/- 180°
Handwheel division	0,001 0,01 0,1 mm
Manual position travel	250 mm
Stroke	max 480 mm
Speed	max 0,2-3000 mm/min
Rotation speed (inverter)	600-1250 rpm

<b>Grinding Wheel Specifications</b>	
Diameter	760-1200 mm
Hole	305 mm
Width	min. 50 mm max. 120 mm


<b>Working Feeds</b>	(mm)
Minimum programmable feed	0,001

<b>Internal Grinding Attachment</b>	
Hole diameter for spindle	100 120 <sup>3</sup> mm
Electric motor	2,20 4,00 <sup>3</sup> kW

<b>Motor s</b>	
Wheelhead	15,00 kW
Workhead	7,50 kW
Wheelhead feed (X axis)	6,00 Nm
Table feed (Z axis)	36,00 Nm
Hydraulic power pack	1,50 kW
Coolant pump	0,18 kW

<b>Dimensions</b>	<b>3000</b>	<b>4000</b>	<b>5000</b>	<b>6000</b>	<b>8000</b>
Length	9860	12260	14000	16500	18500 mm
Width	2400	2400	2400	2400	2400 mm
Height	2650	2650	2650	2650	2650 mm
Net weight	23000	25000	27500	30000	35000 Kg

# Omicron Cnc

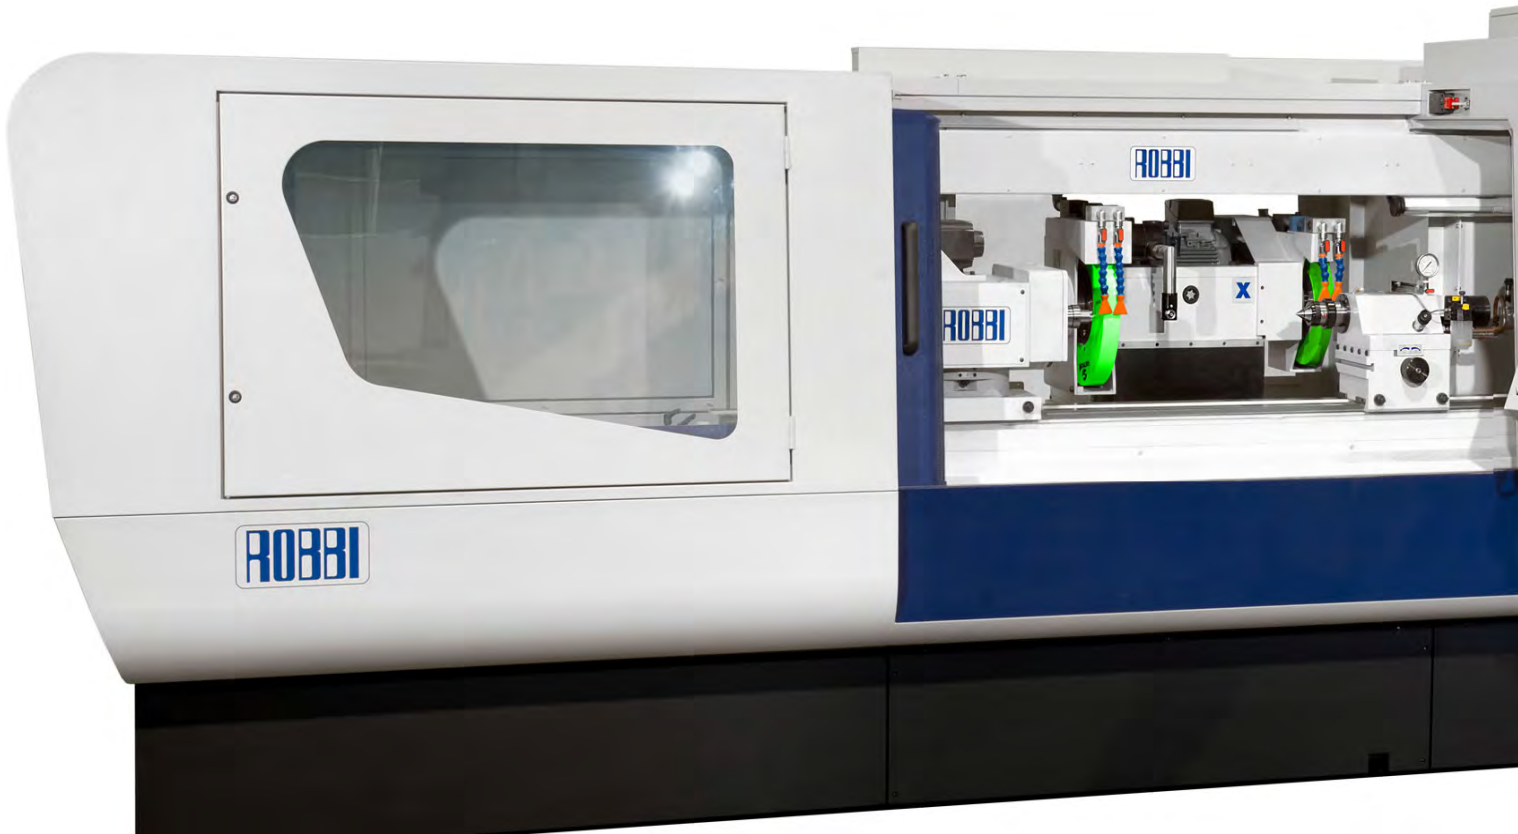

## THE POWER OF THE CNC AND THE PROCESS SIMPLICITY

- The work cycle can be optimised in-process with geometrical and working parameters.
- The CNC grinding machine version is developed in response to needs for medium-high production volumes.
- Equipped with the latest-generation of SIEMENS 840D sl control system.
- Machines can be equipped with automatic measurement devices to process complex components.
- The CNC allows the operator to profile the grind wheel specifically to create geometries for the type of job required.
- High precision crowning operations can be performed by equipping the machines with a third interpolated axis and a bespoke software for this processes.

## EASY PROGRAMMING

The machine operator may create a program, even complex, without ISO programming knowledge.

### Guided Compilation

The compilation of the parameters is guided by a series of messages and icons that explain step by step the meaning of the various parameters.

The programming of the working cycles is done by filling the same parametric working cycle.

Once the working cycle has been programmed, it is also possible to modify the execution sequence of the various cycles, simply and intuitively.

### Errors Control

To eliminate errors in the execution of a program, there is available a summary page to control the main geometric parameters of every single working cycles.

TOOL	
D_P	mm
TOL	mm
P_Z	mm
L_L	mm
S_SF	mm
S_FI	mm
R_R	mm
I_SG	mm
I_SF	mm
I_FI	mm
RPM	U.p.M.
A_L	mm/min
FNI	mm

### Accurate Geometric Results

In each cycle it is possible to correct eventual taper errors, interpolating the two axis X and Z. This permits, in a short time, to obtain very accurate geometric results.

# Easy Human Interface



## COMPLETE CLOSURE - A TYPE

### STANDARD PROGRAMS SUPPLIED WITH THE MACHINE

	Od	ID
Pass	✓	✓
Plunge	✓	✓
Facing	✓	✓
Multi Plunge	✓	
Angular Plunge	✓	✓
Taper	✓	✓

### WHEEL DRESSING PROGRAMMING

It is possible to program all the automatic grinding wheel dressing cycle parameters.

The dressing operation may be executed:

- outside the grinding cycle
- automatically inside the grinding cycle (beginning before finishing or end of cycle),
- automatically using a cycle counter,
- on demand, during the grinding cycle

### SHOULDER GRINDING IN 3 MODES

In each cycle, it is possible to insert the shoulder grinding operation:

#### **Manually**

The machine stops before the finishing operation, permitting the operator to execute the shoulder grinding operation with the electronic handwheel.

#### **Automatically**

The machine executes, before the finishing operation, the shoulder grinding operation, up to the programmed quote.

#### **Automatically with Gap control**



The machine executes, before the finishing operation, an automatic research of the shoulder to be ground by using the gap control. After the contact, the cycle automatically removes the quantity of programmed material. After the shoulder grinding operation it is possible, to execute a zero setting of the Z axis.

In this way it is possible to execute other shoulder grinding operations on the same workpiece with high precision and reduction in cycletime

# Omicron Cnc 32<sup>XX</sup>



## COMPLETE CLOSURE - A TYPE

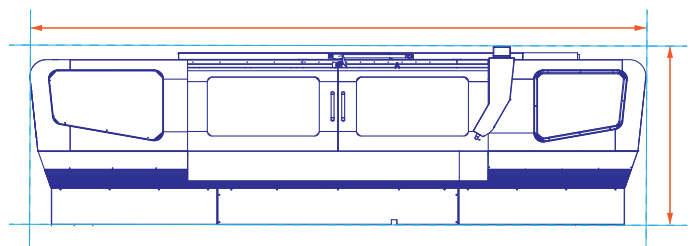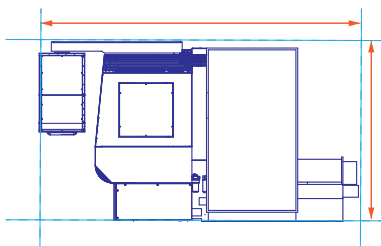



**OMICRON CNC 3206**

<b>Working Capacity</b>		<b>3206</b>	<b>3210</b>
Distance between centers	max.	600	1000mm
Grinding length	max.	600	1000mm
Height of centers over table		160	mm
Swing over table	max.	315	mm
Weight on centers	max.	120	kg
Cantilever weight <sup>1</sup>	max.	40	kg

<b>Table (Z - Axis)</b>		<b>3206</b>	<b>3210</b>
Automatic table traverse	max.	680	1080mm
Swivel on either side		+9° -5°	+8° -4°
Automatic traverse min.		3	mm
Speed		1-5000	mm/min
Handwheel division		0,001 0,01 0,1	mm

<b>Workhead</b>		
Rotation speed		0-600rpm
Spindle hole diameter		26 mm
Internal center taper		4 MT
External center taper		5 ASA
Swivel		90°

<b>Tail Stock</b>		
Spindle stroke		50 mm
Spindle diameter		70 mm
Internal center taper		4 MT

<b>Wheel Head (X - Axis)</b>		
Swivel	max.	+/- 180°
Handwheel division		0,001 0,01 0,1 mm
Manual position travel		130 mm
Stroke	max	200 mm
Speed	max	0,2-3000 mm/min
Rotation speed (inverter)		600-1600 rpm


<b>Grinding Wheel Specifications</b>		
Diameter	max.	450 mm
Hole		∅ 127 mm
Width	min.	20 mm
	max.	50 mm

<b>Working Feeds</b>		(mm)
Minimum programmable feed		0,001

<b>Internal Grinding Attachment</b>		
Hole diameter for spindle		80 mm
Electric motor		1,50 kW

<b>Motors</b>		
Wheelhead		4,00 kW
Workhead		0,75 kW
Wheelhead feed (X axis)		3,00 Nm
Table feed (Z axis)		6,00 Nm
Hydraulic power pack		0,75 kW
Coolant pump		0,18 kW

<b>Dimensions</b>		<b>3206</b>	<b>3210</b>
Length		2900	3700mm
Width		1350	1350mm
Height		1750	1900mm
Net weight		3700	4900Kg

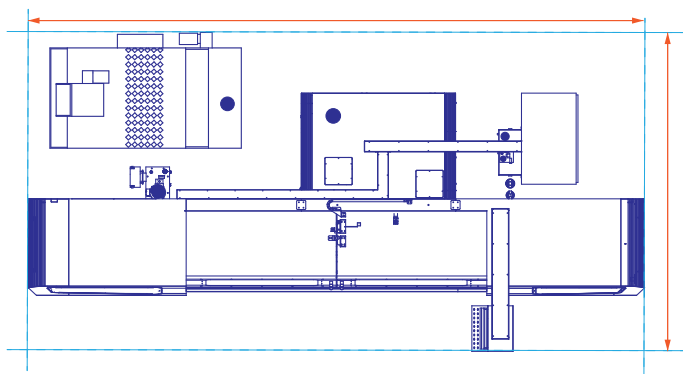


<sup>1</sup>150 mm from workhead spindle nose

<sup>2</sup>Without Inverter

<sup>3</sup>Option

# Omicron Cnc 36 <sup>XX</sup>

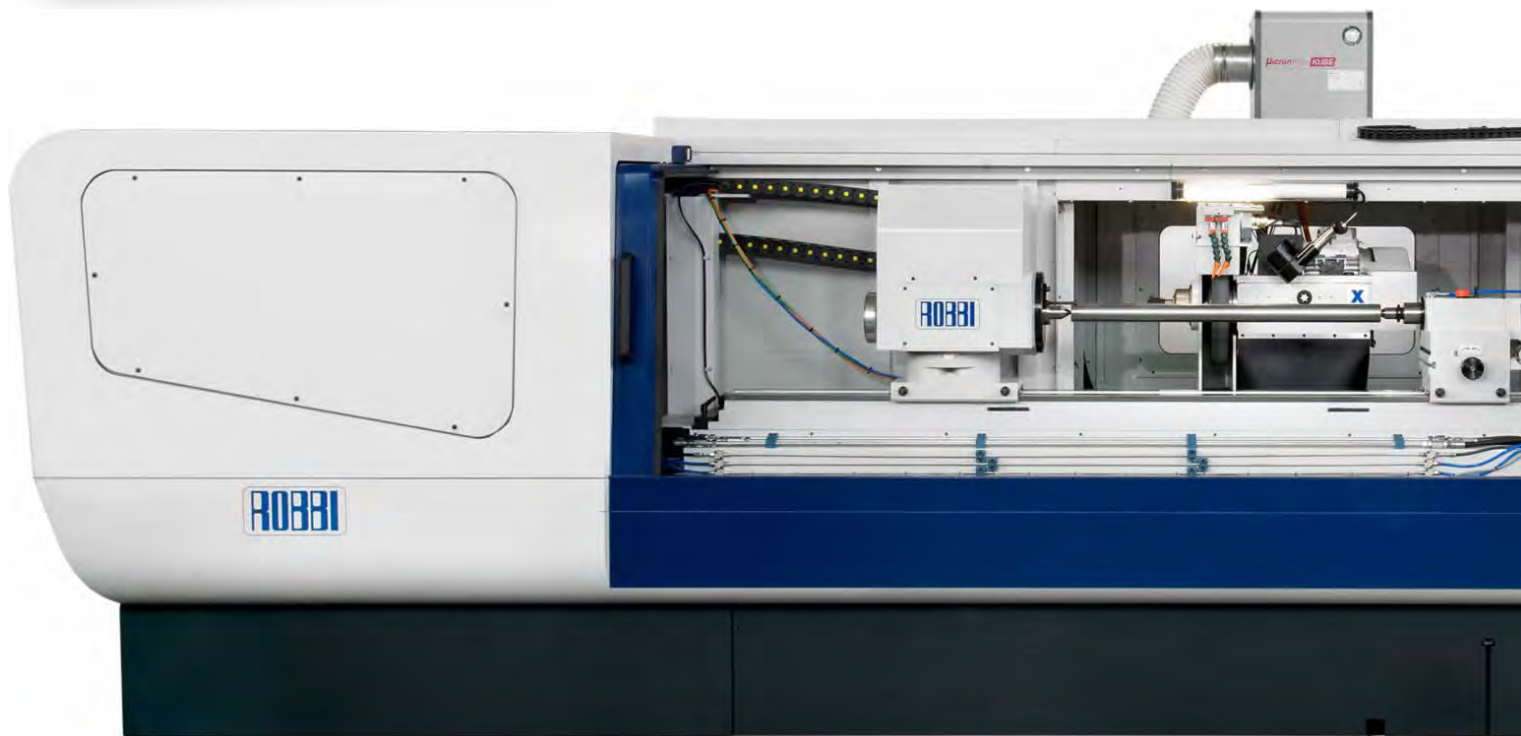





<b>Working Capacity</b>	<b>3606</b>	<b>3610</b>	<b>3615</b>	<b>3620</b>
Distance between centers max.	630	1030	1530	2030 mm
Grinding length max.	630	1030	1530	2030 mm
Height of centers over table			180	230 <sup>3</sup> mm
Swing over table		max. 355	455 <sup>3</sup>	mm
Weight on centers		max. 250	300 <sup>3</sup>	kg
Cantilever weight <sup>1</sup>		max. 80	80	kg

<b>Table (Z - Axis)</b>	<b>3606</b>	<b>3610</b>	<b>3615</b>	<b>3620</b>
Automatic table traverse max.	780	1180	1680	2180 mm
Swivel on either side	+9° -5°	+8° -4°	+7° -3°	+6° -2°
Automatic traverse min.		4		mm
Speed		1-5000		mm/min
Handwheel division		0,001	0,01	0,1 mm

<b>WorkHead</b>	
Rotation speed	0-600 rpm
Spindle hole diameter	31 mm
Internal center taper	5 MT
External center taper	5 ASA
Swivel	90°

<b>TailStock</b>	
Spindle stroke	70 mm
Spindle diameter	70 mm
Internal center taper	5 MT

<b>Wheel Head (X - Axis)</b>	
Swivel	max. +/- 180°
Handwheel division	0,001 0,01 0,1 mm
Manual position travel	200 mm
Stroke	max 380 mm
Speed	max 0,2-3000 mm/min
Rotation speed (inverter)	600-1600 rpm

<b>Grinding Wheel Specifications</b>	
Diameter	450-500 <sup>3</sup> mm
Hole	127 mm
Width	min. 20 mm max. 80 mm


<b>Working Feeds</b>	(mm)
Minimum programmable feed	0,001

<b>Internal Grinding Attachment</b>	
Hole diameter for spindle	100 mm
Electric motor	1,50 kW


<b>Motor s</b>	<b>3606</b>	<b>3610</b>	<b>3615</b>	<b>3620</b>
Wheelhead		5,50 - 7,50 <sup>3</sup>		kW
Workhead		1,50 - 2,20 <sup>3</sup>		kW
Wheelhead feed (X axis)		3,00		Nm
Table feed (Z axis)		11,00		Nm
Hydraulic power pack <sup>3</sup>		0,75		kW
Coolant pump		0,18		kW

<b>Dimensions</b>	<b>3606</b>	<b>3610</b>	<b>3615</b>	<b>3620</b>
Length	2900	3700	5200	6600 mm
Width	1500	1500	1500	1500 mm
Height	2100	2100	2100	2100 mm
Net weight	3800	4700	6200	7700 Kg

# Omicron Cnc 60<sup>xx</sup>

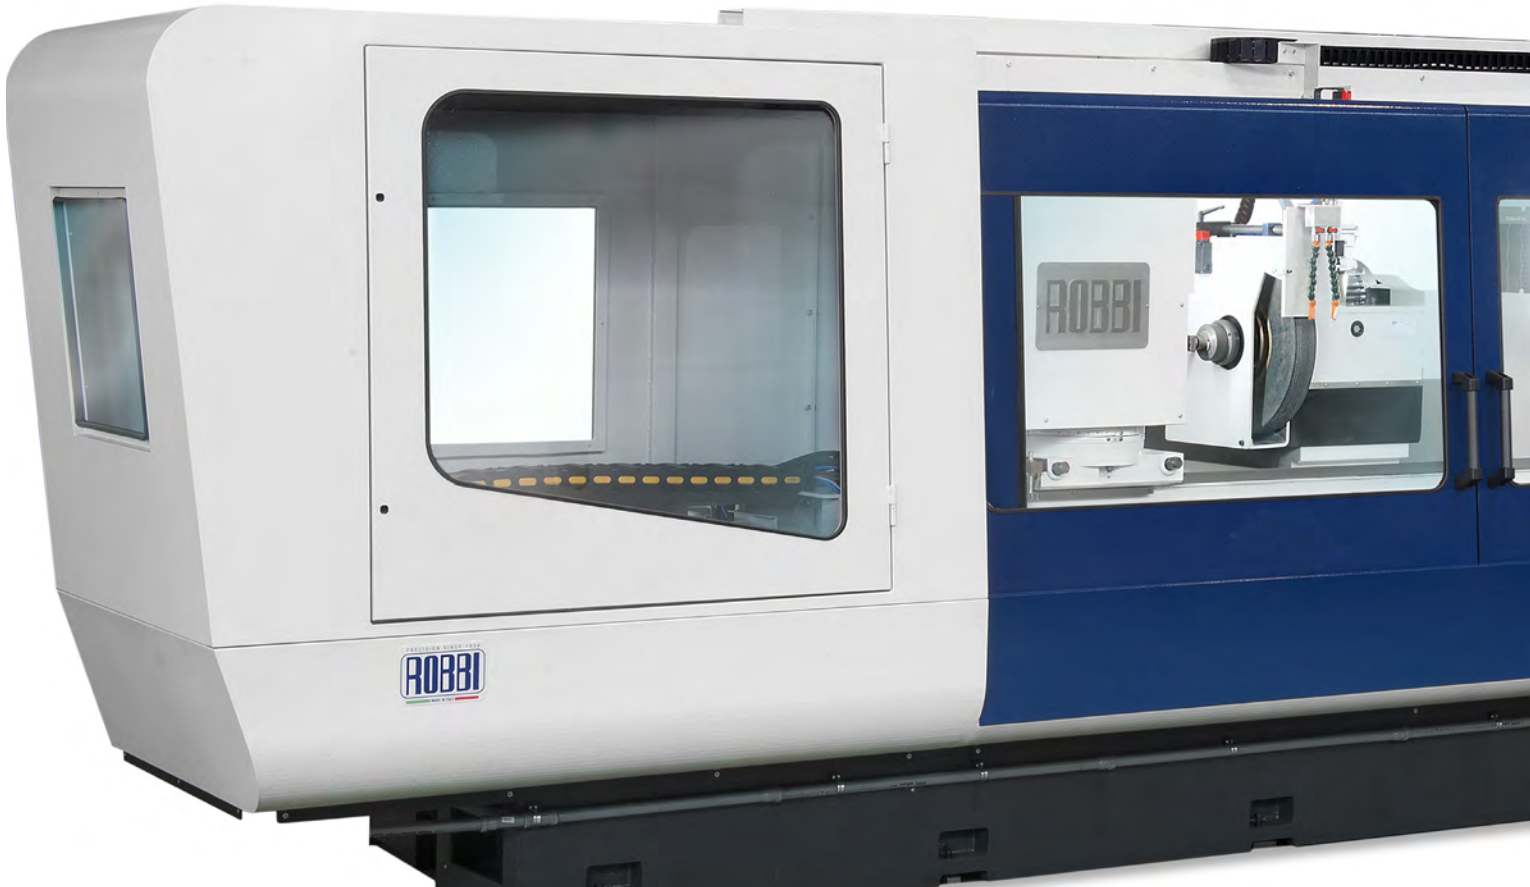

COMPLETE CLOSURE - A TYPE

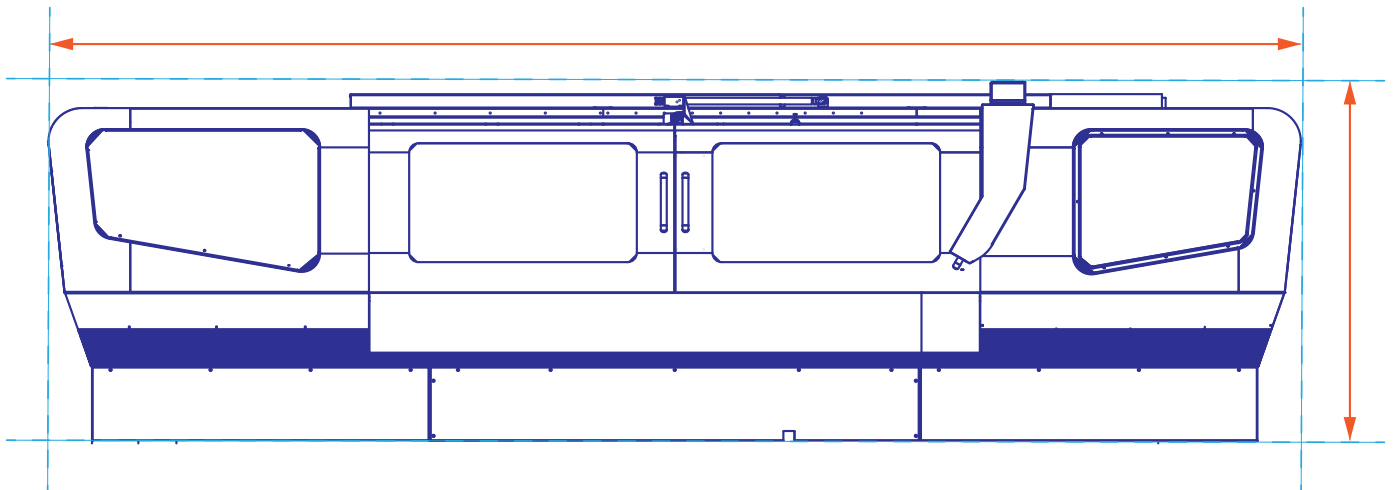



<b>Working Capacity</b>	<b>6010</b>	<b>6015</b>	<b>6020</b>	<b>6030</b>
Distance between centers	max. 1150	1750	2250	3150 mm
Grinding length	max. 1000	1600	2100	3000 mm
Height of centers over table			300	350 <sup>3</sup> mm
Swing over table		max. 595	695 <sup>3</sup>	mm
Weight on centers		max. 1200		kg
Cantilever weight <sup>1</sup>		max. 120		kg

<b>Table (Z - Axis)</b>	<b>6010</b>	<b>6015</b>	<b>6020</b>	<b>6030</b>
Automatic table traverse	max. 1150	1650	2150	3050 mm
Swivel on either side	+8°	+7°	+6°	+5°
	-4°	-3°	-2°	-1°
Automatic traverse min.		3		mm
Speed		1-5000		mm/min
Handwheel division	0,001	0,01	0,1	mm

<b>WorkHead</b>	
Rotation speed	0-350 rpm
Spindle hole diameter	44 mm
Internal center taper	6 MT
External center taper	8 ASA
Swivel	90°

<b>Tail Stock</b>	
Spindle stroke	70 mm
Spindle diameter	80 mm
Internal center taper	5 MT

<b>Wheel Head (X - Axis)</b>	
Swivel	max. +/- 180°
Handwheel division	0,001 0,01 0,1 mm
Manual position travel	250 mm
Stroke	max 480 mm
Speed	max 0,2-3000 mm/min
Rotation speed (inverter)	600-1250 rpm



<b>Grinding Wheel Specifications</b>	
Diameter	max. 610 mm
Hole	230 mm
Width	min. 50 mm max. 120 mm

<b>Working Feeds</b>	(mm)
Minimum programmable feed	0,001

<b>Internal Grinding Attachment</b>	
Hole diameter for spindle	100 120 <sup>3</sup> mm
Electric motor	2,20 4,00 <sup>3</sup> kW

<b>Motors</b>	
Wheelhead	15,00kW
Workhead	3,60kW
Wheelhead feed (X axis)	6,00 Nm
Table feed (Z axis)	11,00 Nm
Hydraulic power pack	0,75kW
Coolant pump	0,18kW

<b>Dimensions</b>	<b>6010</b>	<b>6015</b>	<b>6020</b>	<b>6030</b>
Length	5200	5700	6850	9000 mm
Width	1950	1950	1950	1950 mm
Height	2100	2100	2100	2100 mm
Net weight	6800	8100	9300	11000 Kg

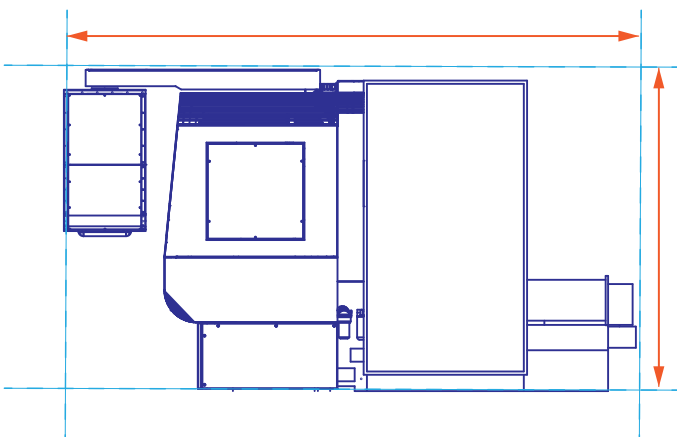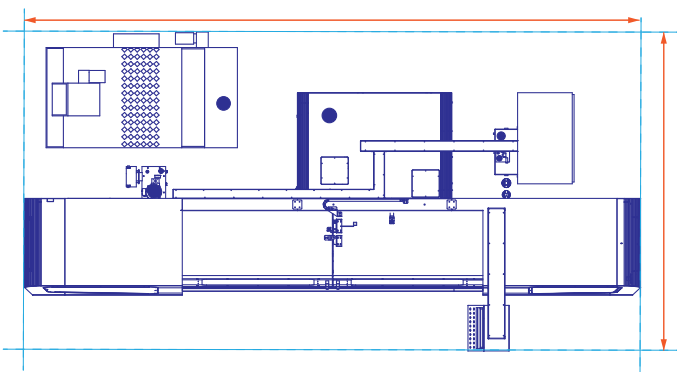

<sup>1</sup>150 mm from workhead spindle nose

<sup>2</sup>Without Inverter

<sup>3</sup>Option

# Omicron Cnc 80 xx





<b>Working Capacity</b>	<b>8030</b>	<b>8040</b>	<b>8050</b>	<b>8060</b>	<b>8080</b>
Distance between centers max	3000	4000	5000	6000	8000 mm
Grinding length max	3000	4000	5000	6000	8000 mm
Height of centers over table		400	450 <sup>3</sup>	500 <sup>3</sup>	mm
Swing over table		max. 795	895 <sup>3</sup>	995 <sup>3</sup>	mm
Weight on centers		max.	4000		kg
Cantilever weight <sup>1</sup>		max.	180		kg

<b>Table (Z - Axis)</b>	<b>8030</b>	<b>8040</b>	<b>8050</b>	<b>8060</b>	<b>8080</b>
Automatic table traverse max	3200	4200	5200	6200	8200 mm
Swivel on either side	+5°	+4°	+3°	+2°	+0°
	-1°	-1°	-1°	-1°	-0°
Automatic traverse min.			4		mm
Speed			1-5000		mm/min
Handwheel division		0,001	0,01	0,1	mm

<b>Workhead</b>	
Rotation speed	0-150 rpm
Spindle hole diameter	44 mm
Internal center taper	6 MT
External center taper	8 ASA
Swivel	90°

<b>Tail Stock</b>	
Spindle stroke	80 mm
Spindle diameter	120 mm
Internal center taper	6 MT

<b>Wheel Head (X - Axis)</b>	
Swivel	max. +/- 180°
Handwheel division	0,001 0,01 0,1 mm
Manual position travel	250 mm
Stroke	max 480 mm
Speed	max 0,2-3000 mm/min
Rotation speed (inverter)	600-1250 rpm

<b>Grinding Wheel Specifications</b>	
Diameter	760-1200 mm
Hole	305 mm
Width	min. 50 mm max. 120 mm

<b>Working Feeds</b>	(mm)
Minimum programmable feed	0,001

<b>Internal Grinding Attachment</b>	
Hole diameter for spindle	100 100 <sup>3</sup> mm
Electric motor	2,20 4,00 <sup>3</sup> kW

<b>Motors</b>	
Wheelhead	15,00 18,00 <sup>3</sup> kW
Workhead	7,50 kW
Wheelhead feed (X axis)	6,00 Nm
Table feed (Z axis)	36,00 Nm
Hydraulic power pack	1,50 kW
Coolant pump	0,18 kW


<b>Dimensions</b>	<b>8030</b>	<b>8040</b>	<b>8050</b>	<b>8060</b>	<b>8080</b>
Length	9860	12260	14000	16500	18500 mm
Width	2400	2400	2400	2400	2400 mm
Height	2650	2650	2650	2650	2650 mm
Net weight	23000	25000	27500	30000	35000 kg

<sup>1</sup>150 mm from workhead spindle nose

<sup>2</sup>Without Inverter

<sup>3</sup>Option

# Technical Specifications

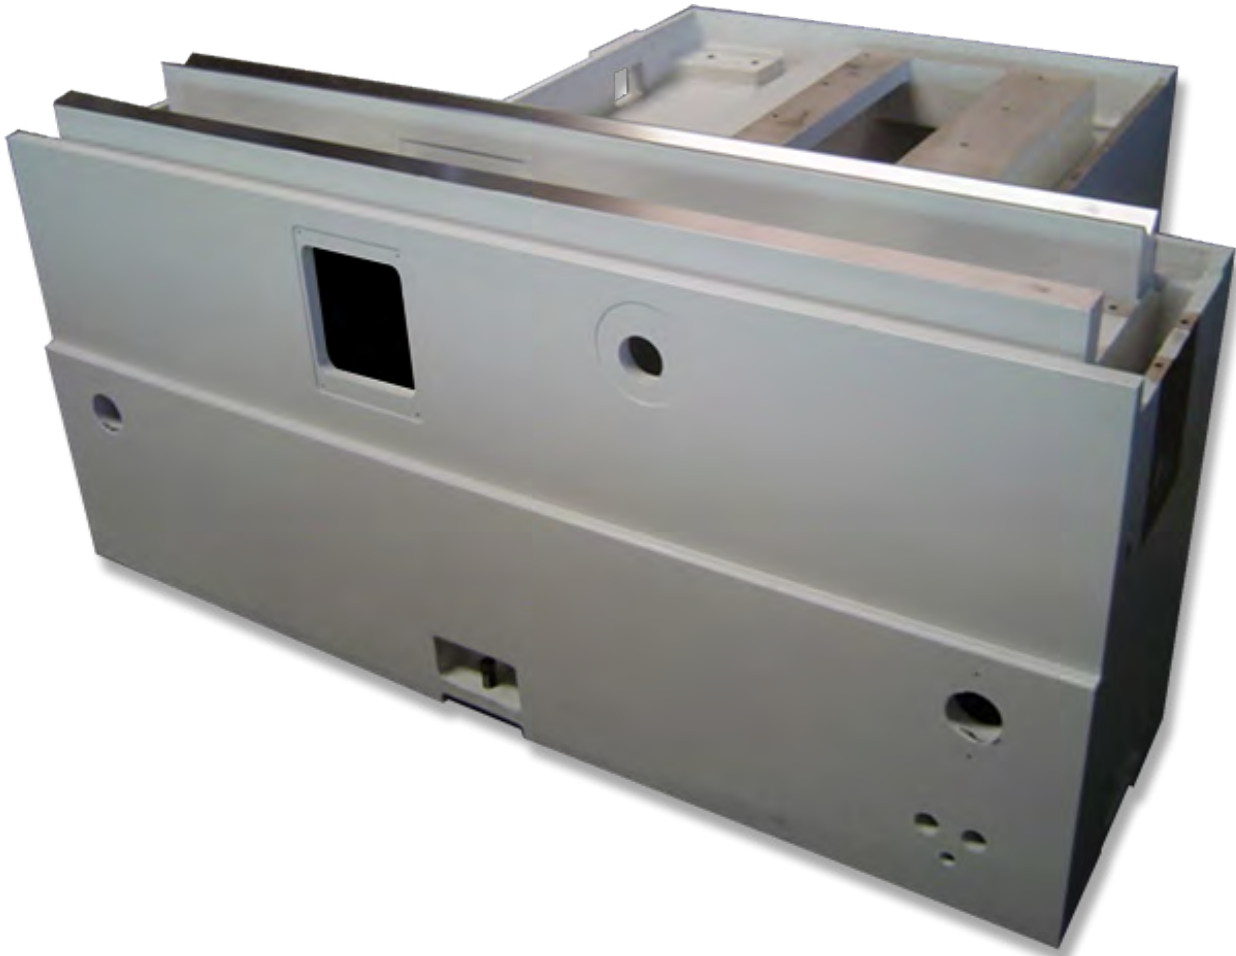

## Base

Structure in normalised and stabilised cast iron with large ground guides.  
On all the lower part of the perimeter are situated the recesses for machine levelling.

## Table

The table is manufactured in two parts, both are in normalised and stabilised cast iron.  
Lubrication is assured by a constant oil flow distributed over the complete length of the table.  
The upper part of the table is swivelable in the two directions making it suitable for grinding tapered workpieces.

## Equipment and Electrical Plant

The cabinet houses all the electrical / electronic components, PCL control, axis motor controllers etc.

## Lubrication Plant

The lubrication power pack, is separate from the machine and supplies continuous oil to the wheelhead and table guides.  
The recovered and filtered table oil is returned to the power pack.

## Hydraulic Plant

The hydraulic power pack, is separate from the machine and activates the hydraulic cylinder of the tailstock.

## Pneumatic Plant

This distributes the air to the air cushion on the workhead, tailstock, table and wheelhead top-slide as required during the set up and manual movement of the major parts.

## Protections

For the protection of the operator all movable parts are covered with CE compliant guards.  
Belts and moving parts are covered.  
The front protections are sheet sliding doors with polycarbonate shields, as standard.  
There are two fix steel sheets positioned on the sides of the bed.  
There is also a movable shield in sheet metal, controlled by a pneumatic cylinder, protects the operator, when the grinding wheel is in rotation and the front sliding doors are open.  
A built in interlock safety device, does not permit the automatic cycle to start if the front sliding doors are open

# Technical Specifications

		Con	Semi	Cnc	
TABLE	Automatic table	hydraulic cylinder	√		
	longitudinal movement	re-circulating ball screw with preloaded nut		√ √	
	Large ground guides, accurately hand scrapped to permit a better sliding		√		
	Micrometric device with dial gauge for taper control		√	√	√
	Machines with distance between centers of more than 4000 mm, the swivelling is facilitated and more precise with teh an air cushion system			√	√
DRESSER	External diamond dresser on the tailstock		√	√	√
	Grinding wheel dressing with radius on the edges and interpolation between X and Z				√
	External wheel dresser support mounted on headstock				0
	High frequency diamond roll (dressing wheels in CBN or PCD)			0	0
	Internal diamond dressing device positioned on the table		√	√	√
Internal wheel dresser support, tilting hydraulic			0	0	
ELECTRICAL PLANT CABINET					
The internal temperature of the cabinet is controlled by an air-conditioning unit.		0	0	√	
HYDRAULIC CYLINDER DRIVE	tabel and wheelhead movement		√		
	tailstock		0	0	√
RE-CIRCULATING BALL SCREW NUTS: GREASE LUBRICATED			√	√	
COOLANT PLANT	Automatic opening and closing coolant flow		√	√	√
	Large capacity tank for the coolant complete with electro pump		√	√	√
	Coolant plant with combined magnetic+paper roll cleaner.		0	0	√
FIXED STEEL SHEETS INSTALLED ON THE BED SIDES			√	√	
COMPLETE CLOSURE		0	0	0	

# Standard Equipment

		Con	Semi	Cnc
	Coolant equipment complete with pump, electrical equipment, tank, pipes and nozzle	√	√	√
	Magnetic and paper roll	O	O	√
Coolant Filters	Paper roll	O	O	
	Magnetic	O	O	
	One Grinding Wheel	√	√	√
Grinding wheel	Flange	√	√	√
	Balancing arbor	√	√	√
	Extractor	√	√	√
	2 hard metal tipped centres		√	√
	Set of levelling screws and plates	O	O	O
	2 cloth bellows for table guide protection	√	√	√
Set of	service spanners	√	√	√
	hexagonal spanners	√	√	√
Oil for lubrication	wheel spindle 5 kg		√	√
	guide 5 kg	O	O	O
	Instruction manual	√	√	√

# Equipment


		Con	Semi	Cnc
Axis digital readout	X wheel head	√	O	√
	Z table	√	O	O
	Wheel head and table automatic electronic feeds controlled by brushless motors		√	√
Re-circulating ball screw with preloaded nut	X wheel head		√	√
	Z table		√	√
	Table manual swivelling system for taper grinding with dial gauge	√	√	√
Wheelhead	Wheelhead slides by means of a recirculating ball screw with double pre-loaded nut, on linear motion guide with roller cage.	√	√	√
	Hydraulic unit for tailstock control	O	O	√
	Pneumatic unit	√	√	√
	Centralized lubrication	√	√	√



# Encloser


## Type A - Rounded

- COMPLETE ENCLOSER
- ELEGANT
- BALANCED STYLE

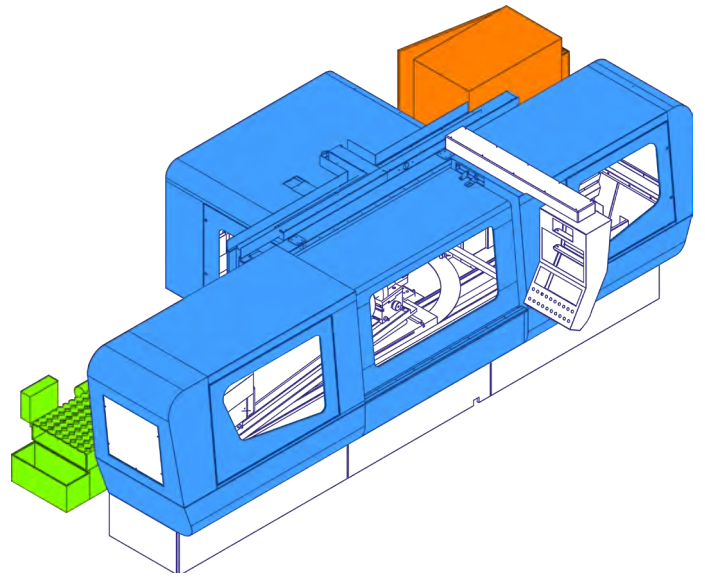

## Tipo C - Standard

- OPEN TOP
- FUNCTIONAL

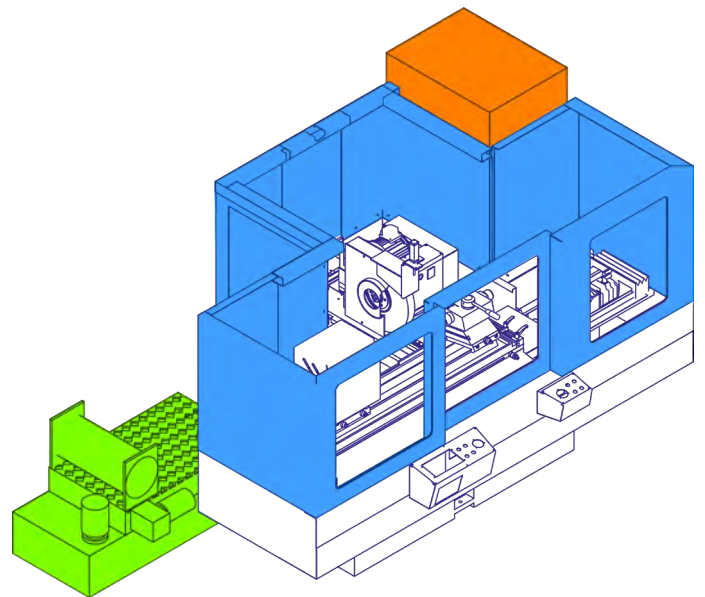

# Wheelhead

## POSITIONING PRECISION

The structure is composed of two carriages in normalised cast iron.  
The upper carriage where the hydrodynamic spindle is located, has a manual stroke positioning to optimise the use of the grinding wheel.  
An air flow facilitates the positioning.  
The lower carriage slides by means of a recirculating ball screw with double preloaded nut, on linear motion guide with roller cage.  
The greasing of the guides is timed.  
The brushless motor which moves the screw, may be controlled (on request) with a closed loop by the incremental linear encoder, which guarantees a positioning precision on the complete stroke of 0,0001 mm

## WHEELHEAD SPINDLE

Hydrodynamic type, rotates on anti-friction metal bushes, guaranteeing high finish degree.  
Rotation by means of an AC motor.  
Transmission by means of pulleys and Poly-V belt.  
The speed is regulated by inverter






## WHEELHEAD ROTATION 180°

The wheelhead rotates manually 180°.  
On request, the wheelhead rotation of 180° may be executed :

- 1 manually with DRO
- 2 index swivel of 2.5°, with Hirth coupling :
  - manual
  - automatic with brushless motor
- 3 in continue with TORQUE motor

## WHEELHEAD CONFIGURATIONS:

On request, the Wheelhead is available with different configurations:

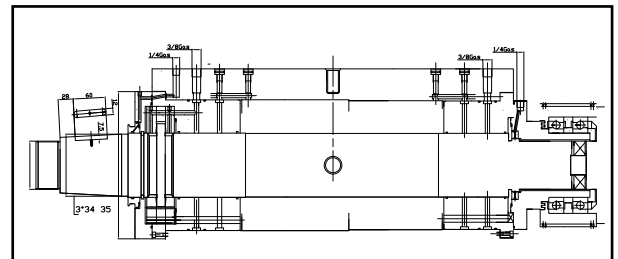

# Workhead




## DEAD AND LIVE SPINDLE POSITIONING FACILITATED BY AN AIR FLOW

The structure is normalised, stabilised and well ribbed cast iron, supports the workpiece weight and the force generated by the grinding operation. Equipped with dead and live spindle.

The spindle rotates:

- on high precision ball bearings, guaranteeing restricted tolerance and maximum rigidity in the working;
- by means of a AC motor and the rpm adjustments are programmable on the operator panel;
- may be intermittently manual or automatic.

The workhead positioning on the table is facilitated by an air flow.

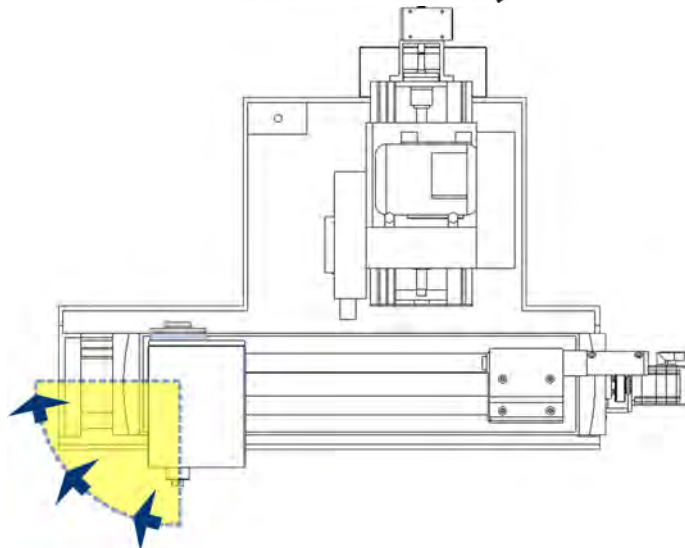


## WORKHEADS ROTATION 180°

Workhead rotates 90 degrees and the rotation can be:

- manual
- manually with DRO\*
- Automatically with Indexing 1° Hirth coupling \*
- Manually with Indexing 1° Hirth coupling \*

\*On request

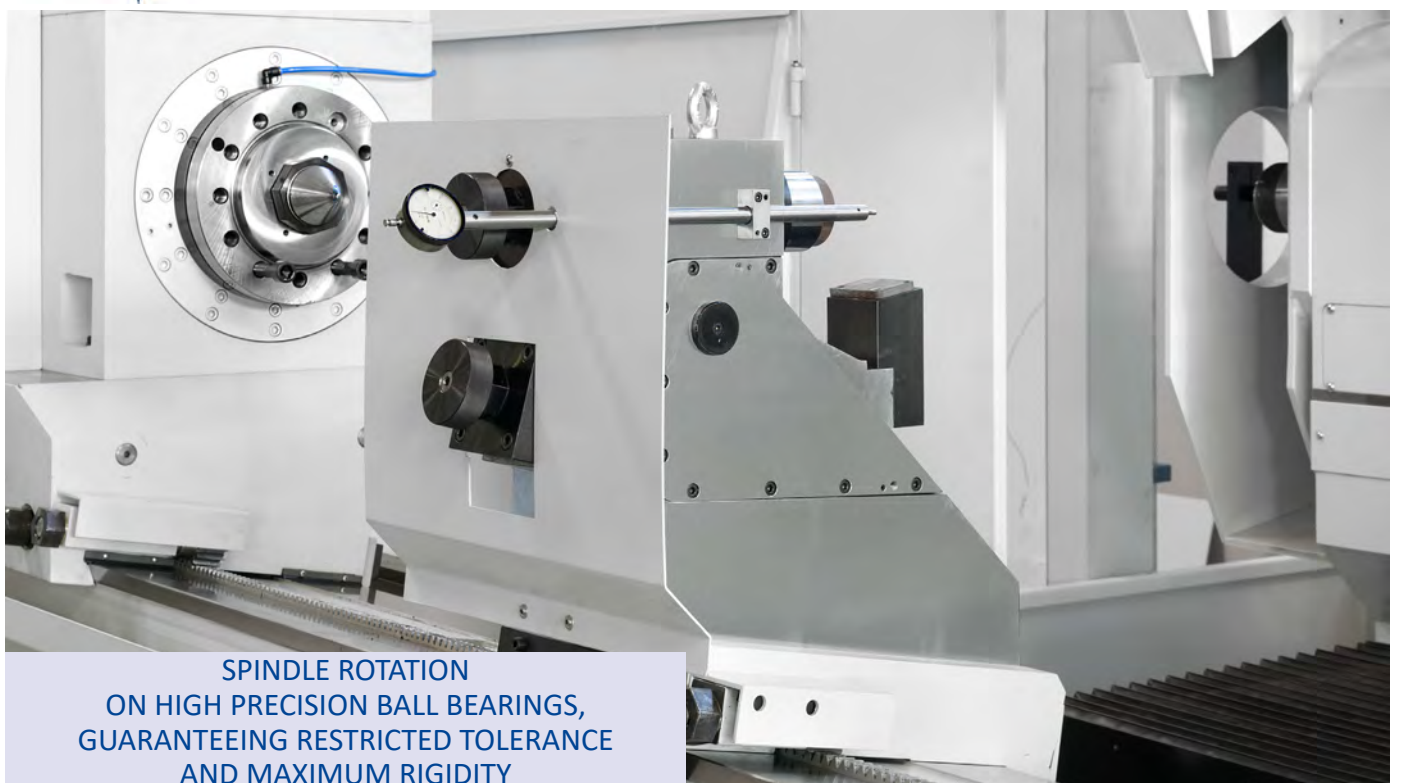

SPINDLE ROTATION  
ON HIGH PRECISION BALL BEARINGS,  
GUARANTEEING RESTRICTED TOLERANCE  
AND MAXIMUM RIGIDITY

# TailStock

Machine models PT6 and MT6, are supplied standard with Hydraulic opening / closure and micrometric correction of the cylindricity

Machine models RT6 and ET6 are available in three different versions:

- manual opening (standard);
- hydraulic opening (on request);
- hydraulic opening / closure and micrometric correction of the cylindricity (on request).



# Internal Grinding

The machine (on request) may be equipped with internal grinding attachment, which may be mounted in two versions:


- drop down over wheel head
- on rear side of wheel head.

Robbi Group offers a large of internal grinding spindles that can be :


- belt driven spindles up to 42,000 RPM
- electric spindles up to 120,000 RPM

LARGE RANGE OF QUILLS AND ATTACHMENTS ARE AVAILABLE

INTERNAL GRINDING SPINDLE MOUNTED  
ON REAR SIDE OF WHEEL HEAD

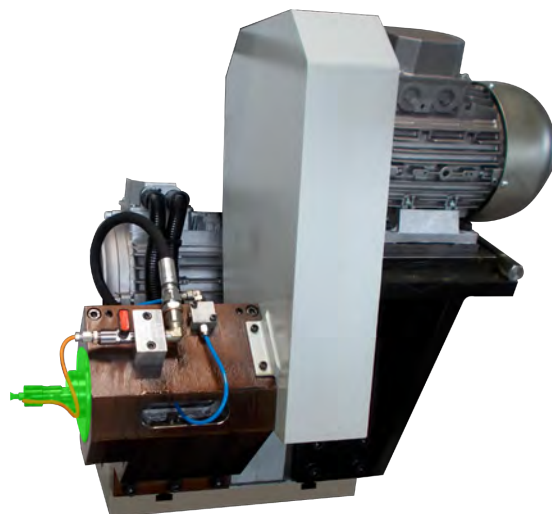

INTERNAL GRINDING SPINDLE MOUNTED  
DROP DOWN OVER WHEEL HEAD

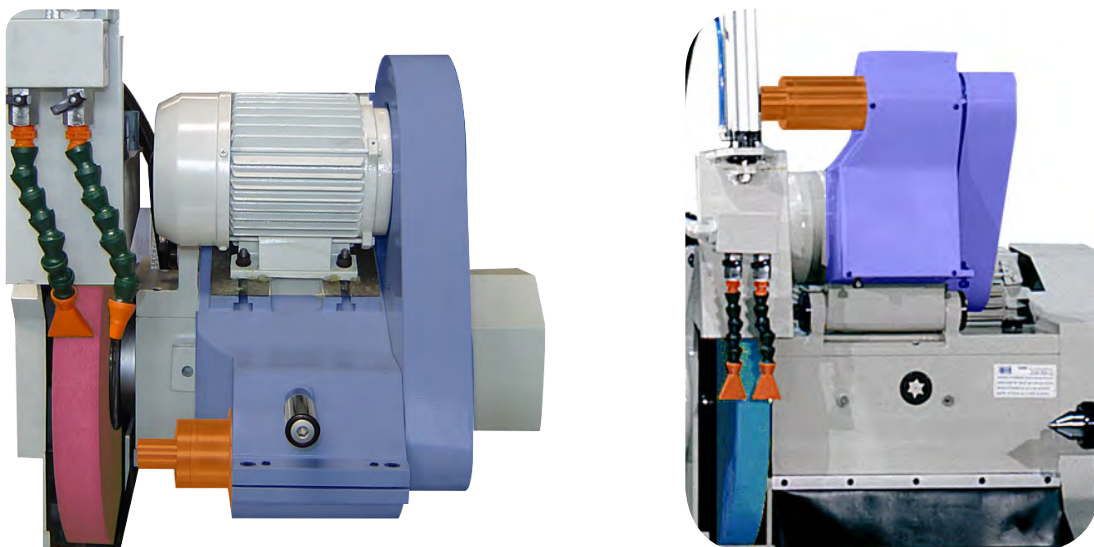

# Wheel Dressing


## CUSTOMIZABLE ACCORDING TO THE PROCESS REQUIRED

A well dressed grinding wheel is crucial to obtain a high-performance and high-quality grinding process. The wheel dresser for external grinding wheels can be mounted on the:

- table
- tailstock

The wheel dresser support can be:



- fixed
- tilting hydraulic

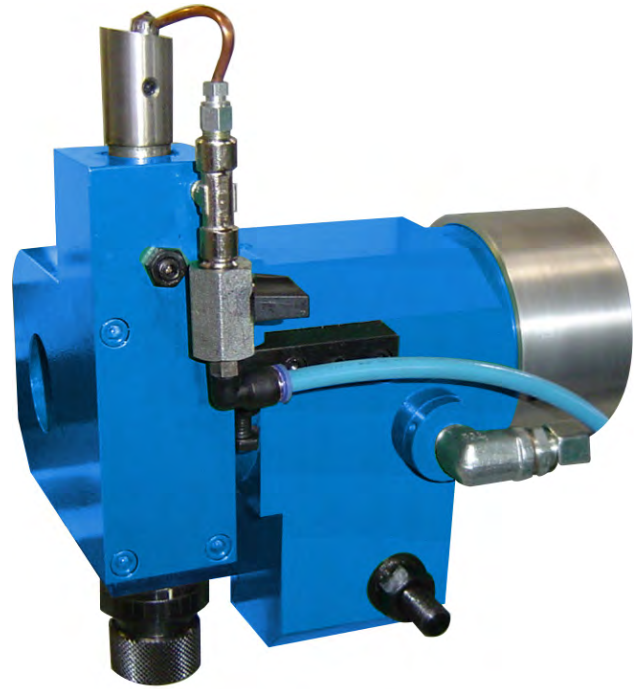

## DRESSING FIXED TOOLS OR HIGH FREQUENCY DIAMOND ROLLS

The machine can use for dressing:

- fixed tools
- or high frequency diamond rolls, particularly useful for internal grinding wheels

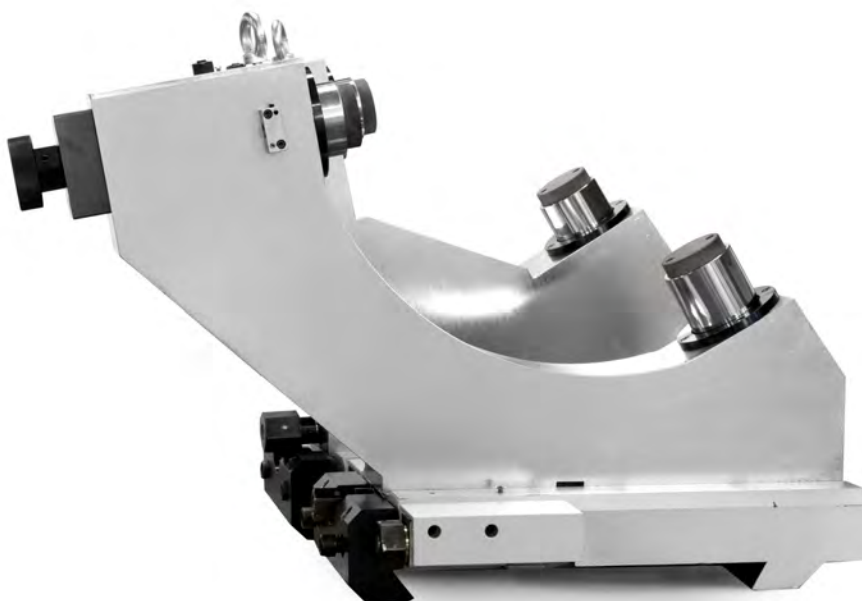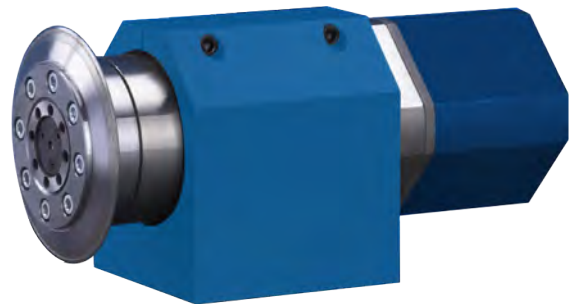

# Process Control

## GRINDING WHEEL BALANCING

Continuously monitors the condition of the machine in real time and compensates any unbalance of the grinding wheel .

Grinding Wheel Balancing :

- improves the mechanical stability
- improves the surface quality, avoiding risks of facets , circularity defects errors and roughness
- allows to increase the peripheral speed of the grinding wheel
- increases the productivity
- reduces stress on the spindle bearings

## CONTACT CONTROL

The instant in which the grinding wheel comes into contact with the workpiece, is important to:

- reduce the cycle time
- minimise the 'gap' time, maximising the axis feeds

The analysis of the contact between grinding wheel-dresser, consents to obtain a perfect profile optimising the scrap.



DETECTS SUB-MICRON CONTACTS ("GAP")

MONITORS CONSTANTLY THE WORK

PREVENTS COLLISION ("ANTI-CRASH")

# In Process Measuring System

## WORKPIECE SETTING

The use of a flagging device combined to the PLC control records the position of the workpiece in Z axis (table).

## IN PROCESS MEASURING SYSTEM

The use of measuring systems during the working, permits to grind components with high restricted tolerance.

The available methods are :

- Absolute measurement of diameters, with large ranges
- Measurement of small and large ranges, with reference master
- Control of continuous and interrupted surfaces (regular and irregular)
- Analysis of roundness and shape
- Measurement of the diameters: external, internal, thickness, scrap, taper, shoulder, etc.
- Automatic compensation of the in-process correction.





# Digital Factory

OMICRON CNC  
GRINDING MACHINES  
ARE EQUIPPED WITH (Optional)  
MINDSPHERE  
SIEMENS

MORE PRODUCTIVITY

MORE QUALITY

DIGITALIZATION OF PRODUCTION PROCESS

The CNC machines can be integrated with software and with appropriate sensors to:

- digitize the production process
- analyze the working parameters
- verify the machine status

The CNC machines may be further customized (on request) to meet customer's production process requirements

ANALYSIS OF:



ACCELERATION

TEMPERATURE

SPEED

VIBRATIONS

- to monitor continuously the working conditions
- to be checked and serviced worldwide, safely
- to perform part programs from an external memory

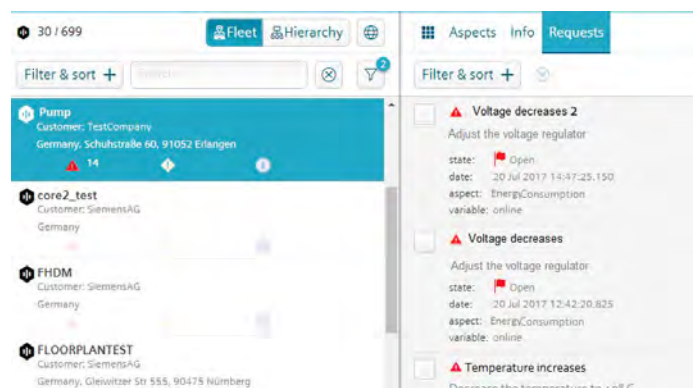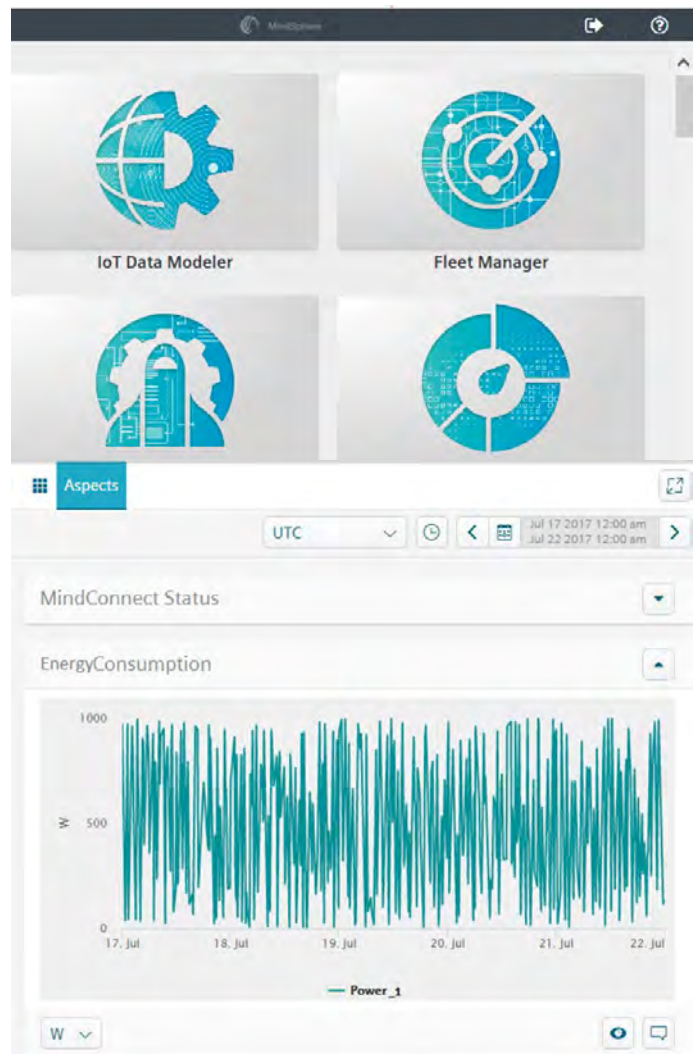





# At Your Service Since 1936



*Robbi has operated in the machine tool market since 1936 and specialise in the manufacture of machines tailored to meet the more demanding needs of the customer's complex and more specialised demands.*

*Whilst maintaining competitive prices, Robbi have ensured their machines have stability and precision.*



*Robbi grinding machines, use the best technology and the most robust and reliable components available on the market in their build programme.*

*Robbi have a commitment to assist and help, proactively, its customers to ensure they maximise the efficiency of the machine.*



*Robbi, in fact, offers various service solutions, including the:*

- *development of manufacturing processes;*
- *replacement parts spare part programme,*
- *making parts available for older models,*
- *tailored operational training programs*
- *and maintenance training to maximise the features of grinding machines and maintain the Robbi Grinders longevity.*



*Understanding the needs of our customers we are offer the best solutions and services that increase their return on productivity thus improving our customers return on his investment.*

*Ideas that may improve our business are always appreciated from customers.*

*If there's anything we can do to improve your experience with Robbi, please let us know.*

*Robbi have a commitment to ensure all customers are completely satisfied.*

*Choose Robbi precision for increased productivity and a faster return on your investment.*

*Call us today, we've have a solution for your grinding application.*



Texts, illustrations and specifications reported in this catalogue are based on information available at the time of publication. Despite the efforts, this document can contain technical inaccuracies or typographical errors.

Robbi Group reserves the right to make changes at any time and without notice, any content including pictures and text. Robbi Group assumes no responsibility for any inaccuracies, errors or omissions presents in this catalogue.



Robbi Group srl  
Via Galileo Galilei, 195  
37040 Zimella - Verona  
Italia  
39 0442 47700  
39 0442 47966

robbi@robbigroup.com  
www.rettificatrici-robbi.com

